

Series 6, Canopy Extractor, 86 cm DHL885C



DHZ5316	Standard odor filter (replacement)
DHZ5605	Standard recirculation kit
DWZ0IT0P0	Long Life odor filter (replacement)
DWZ1IT1D1	Long Life recirculation kit external
DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- **silent:** maximal extractor performance with little noise
- **LED-Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **Extraction rate:** at MAX_FOERDERLEISTUNG m3/h, it quickly ensures optimal kitchen air quality.
- **Metal grease filters:** filter grease and other solid particles out of the extracted air

Typology: Built-in/Built-under
 Length electrical supply cord: 150.0 cm
 Min. required niche size for installation (HxWxD): 418mm x 836.0mm x 264mm mm
 Net weight:9.9 kg
 Type of control:Electronic
 Max. air extraction: 630 m³/h
 Boost position output recirculating: 639 m³/h
 Max. air recirculation: 568 m³/h
 Boost position air extraction: 730 m³/h
 Number of lights: 2
 Noise level:65 dB(A) re 1 pW
 Diameter of air outlet: 150 / 120 mm
 Grease filter material:Washable aluminium
 Odour filter: No
 Operating Mode: Convertible
 Optional accessories: DHZ5316, DHZ5605, DWZ0IT0P0, DWZ1IT1D1, DWZ1IX1B6, DWZ1IX1C6
 Type of lamps used: LED
 Total power of the lamps: 2 W
 Grease filter type:Kassette
 Connection rating: 277 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Built-in
 Material body: Stainless steel
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in):x x
 Dimensions of the packed product: 14.56 x 18.30 x 38.18
 Net weight:22.000 lbs
 Gross weight: 31.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: Yes
 Length electrical supply cord: 150.0 cm
 Dimensions of the product, with chimney (if exists):418 x 860.0 x 300.0 mm
 Dimensions of the packed product (HxWxD): 370 x 465 x 970 mm
 Net weight:9.9 kg
 Gross weight: 13.9 kg



4 242002 824369


Series 6, Canopy Extractor, 86 cm DHL885C

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.


-
- Energy Efficiency Class: C*
 - Average Energy Consumption: 103.1 kWh/year*
 - Noise max. Normal Level: 65 dB*
 - Canopy hood
 - Suitable for ducted or recirculating operation
 - Recirc. kit or clean air kit
 - Electronic controls
 - push button controls with Electronic display
 - 3 speed + intensive operation
 - Intensive op. revert dur.: 6 min.
 - Metal grease filter with side extraction
 - Stainless steel filter covers
 - Removable metal grease filters, dishwasher safe
 - Light Intensity: 266 lux
 - Colour Temperature: 4000 K
 - Twin channel high performance fan motor
 - Extraction rate exhaust air according to EN 61591:
 - max. normal use 630 m³/h, intensive 730 m³/h
 - Dimensions exhaust air (HxWxD): 418 x 860 x 300 mm
 - Dimensions recirculating (HxWxD): 418 x 860 x 300 mm
 - built-in dimensions (HxWxD): 418 x 836 x 264 mm
 - Power rating: 277 W
 - 120 or 150 mm diameter pipe

Technical information:


Series 6, Canopy Extractor, 86 cm DHL885C

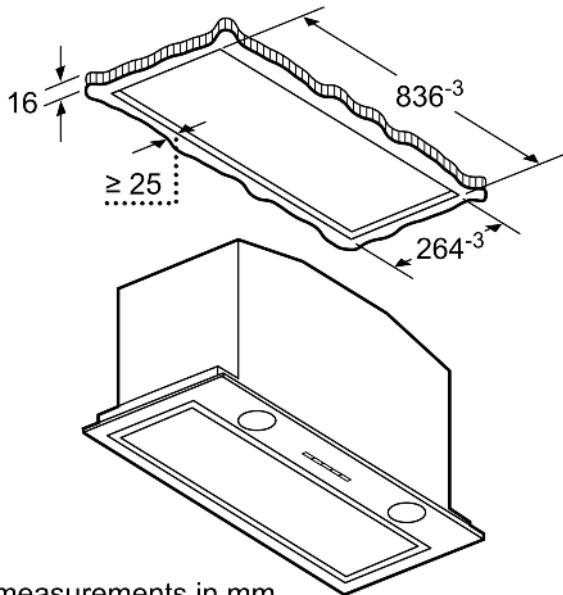

measurements in mm

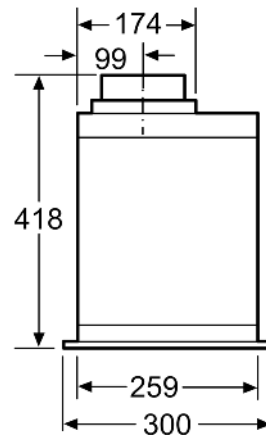


measurements in mm

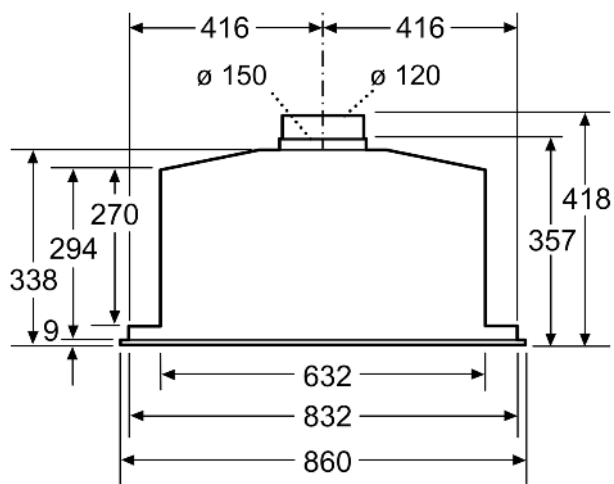

measurements in mm

Measurements in mm

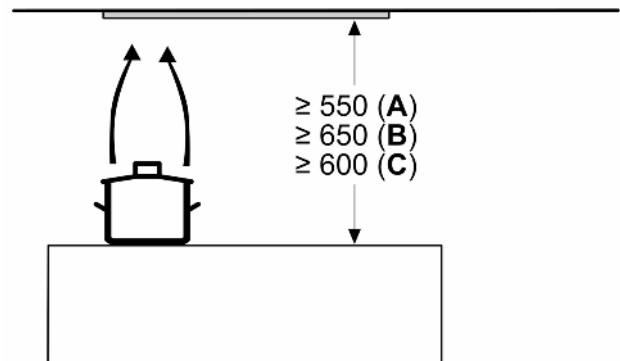

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand