

Series 2, Canopy Extractor, 53 cm DLN53AA50



DWZ0IN0A0 Standard odor filter (replacement)
DWZ0IN0T0 Standard recirculation kit

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- **silent:** maximal extractor performance with little noise
- **LED-Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Extraction rate:** at MAX_FOERDERLEISTUNG m³/h, it quickly ensures optimal kitchen air quality.
- **Metal grease filters:** filter grease and other solid particles out of the extracted air
- **Pi shaped double metal filter**

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Min. required niche size for installation (HxWxD): 208mm x 493.0mm x 257mm mm
Net weight: 4.6 kg
Type of control: mechanical
Number of speed settings: 3
Max. air extraction: 302 m³/h
Max. air recirculation: 300 m³/h
Number of lights: 2
Noise level: 62 dB(A) re 1 pW
Diameter of air outlet: 120 mm
Grease filter material: Washable aluminium
Odour filter: No
Operating Mode: Convertible
Optional accessories: DWZ0IN0A0, DWZ0IN0T0
Total power of the lamps: 6 W
Grease filter type: Kasette
Connection rating: 121 W
Fuse protection: KSA A
Voltage: 220-240 V
Plug type: Gardy plug w/ earthing
Installation typology: Built-in
Material body: Stainless steel
Plug type: Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in): x x
Dimensions of the packed product: 9.84 x 23.62 x 14.56
Net weight: 10.000 lbs
Gross weight: 15.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: Yes
Length electrical supply cord: 150.0 cm
Dimensions of the product, with chimney (if exists): .x 534.0 x 300.0 mm
Dimensions of the packed product (HxWxD): 250 x 600 x 370 mm
Net weight: 4.6 kg
Gross weight: 6.8 kg



4 242005 124893

Series 2, Canopy Extractor, 53 cm DLN53AA50


The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

-
- Energy Efficiency Class: D*
 - Average Energy Consumption: 67.7 kWh/year*
 - Blower Efficiency Class: E*
 - Lighting Efficiency Class: D*
 - Grease Filtering Efficiency Class: D*
 - Noise max. Normal Level: 62 dB*


Measures:

- Canopy hood
- Suitable for ducted or recirculating operation
- Recirculating kit
- Sliding switch control for extractor speeds and light
- 3 speed operation
- Single motor
- Removable metal grease filters, dishwasher safe
- 2 x 4 W LED 3W E14
- Light Intensity: 78 lux
- Colour Temperature: 2700 K
- Ducted extraction rate according to DIN/EN 61591: max. 302 m³/h
- Max. extraction rate: 302 m³/h
- Dimensions (HxWxD): 208 x 534 x 300 mm
- built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Power rating: 121 W
- 120 mm diameter pipe


Series 2, Canopy Extractor, 53 cm DLN53AA50

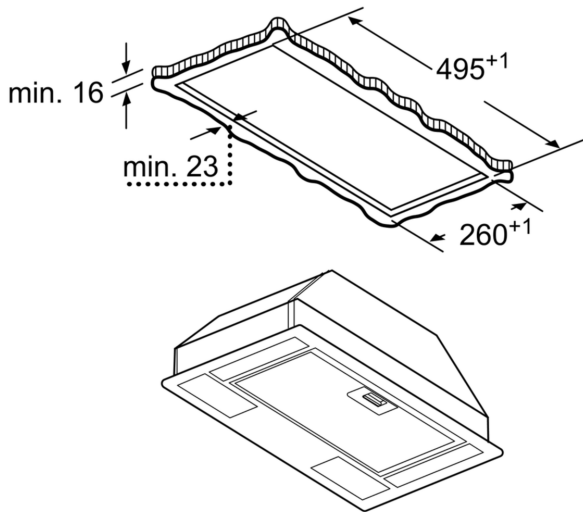


measurements in mm

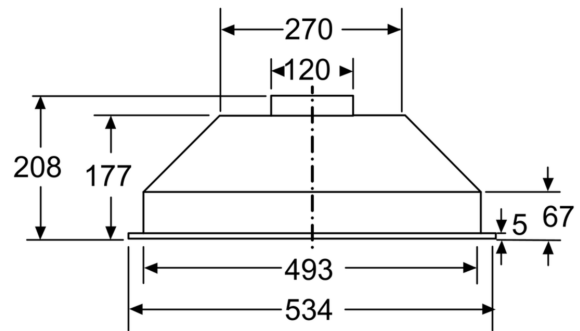

measurements in mm

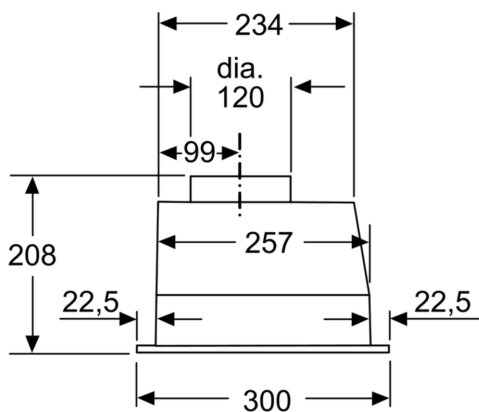

measurements in mm

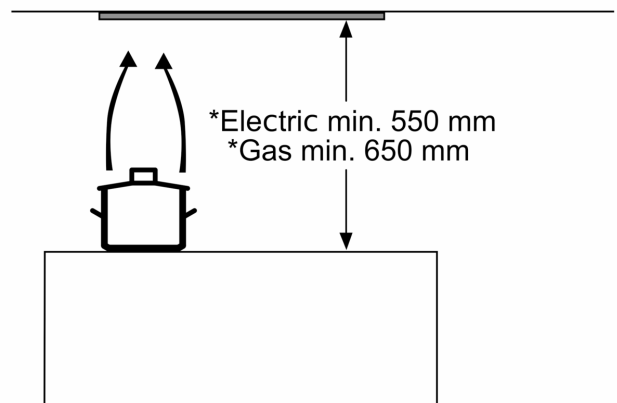

* from upper edge of
pan support

measurements in mm

*Electric min. 550 mm
*Gas min. 650 mm